



# Fiber Optical Splice Closure

## GJS20-DM02A

### Installation Manual



### GJS20-DM02A Series of Fiber Closure datesheet





### 1. Advantage:

- 1.1 The closure can be used in duct, buried, overhead..etc
- 1.2 High quality impact,shell with material.pp and internal is ABS
- 1.3 use sillcon rubber seal material ,not need replace when open.
- 1.4 Fiber storage with bracket
- 1.5 Modular fiber management system
- 1.6 groment entry hole diameter range: 12x4+2x18
- 1.7 Sealing way of cables: mechanical seal cable port
- 1.8 Quality warranty:2 years
- 1.9 Life span:more than 25 years
- 1.10 IP rating is IP68




**GJS20-Dm02A FOSC conform the standard communications industry of The People's Republic of China: YD/T814-2004**

### specification

- ①Temperature: -30°C- +60°C Atmospheric Pressure:70-106Kpa
- ②.Life Span:More than 20 years.
- ③.Material:Higt strength polypropylene(PP)



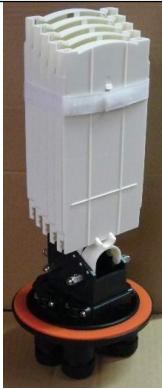




splice tray number/model	DM-02A(12F /1TRAY)	DM-02A (24f/1tray)	GJS20-DM02A(metal bracket)	GJS20-DM02A (back bracket)	GJS20-DM02a- (basket bracket)
one splice tray	12 cores	24 cores			
two splice trays	24 cores	48 cores			
three splice trays	36 cores	72cores			
four splice trays	48 cores	96cores			

### (2) Dimension of inlets/outlets and the closure

Model	Round port(30mm)	Big round port(60mm)	tray	Max core	Dome closure diameter (mm)	Length (mm)
DM-02A	4	1	4	96	131	446

GROMMET Model	CABLE RANGE(mm)	DESCRIPTION	Splitting location	stardard
GROMMET A	10~14	1-entry grommet	choice	
GROMMET b	16~20	2-entry grommet	choice	
GROMMET c	3	10-entry grommet	CHOICE	

GROMMET INSIDE CABLE RANGE CAN BE MADE REQUIRE

**Remark:**on one big port, it can be suit for 2 cables .and can be used for cutting online.,for drop cable,the grommet was made 12hole with 7mm diameter.







Environment Temperature: -30°C~+60°C


Atmospheric Pressure: 70kPa~106kPa

Lifespan: more than 20 years


### (3) Accessories:

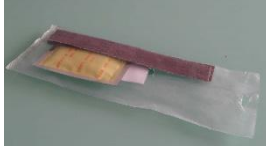

		
1. Fiber Protective Tube	2.Cable fix tie	3. Sand paper
		
4 Label paper	5Fiber protective tube	6.hesive tape

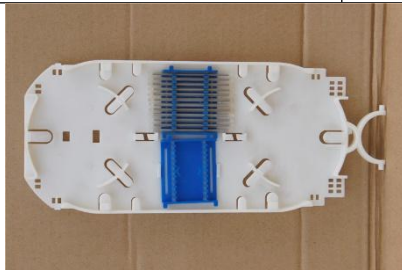

**This is 02A tray with 2 holder for 24 fiber. It is use 03A type with metal bracket**

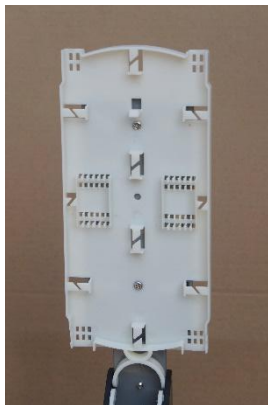

**The endcap entries**





closure was hold on the ploe with bracket

### 3 order information

packing	Packing size	Pack pcs	Weight(kg)	
carton	48x48x63	6	15	